

BOTTOM TRANSFER LOADING ARM | E2033



Shown design with emergency release system

Bottom transfer loaders provide extended reach that makes them ideal for applications where a vehicle cannot be accurately spotted.

Easy to adjust, super smooth action spring cylinder balance, and heavy duty capacity swivel joints enable these arms to reach further without the need for additional support.

Standard arms feature the D2000 World Series swivel joint. A heavy duty, low profile joint with a 5-year maintenance free limited warranty. A variety of seal configurations and elastomers ensure long life performance for each specific application.

Spring cylinder balance has up to 95 deg of vertical movement for easy to handle alignment and out of the way parking.


Not recommended for multiple arm crossover. See E2573 and E2304.

Pipe sizes: 2" through 12"

Materials of liquid path: Carbon steel, Carbon steel/Aluminum, 316L Stainless steel.


Riser connection options

Loading arms shown in the park position

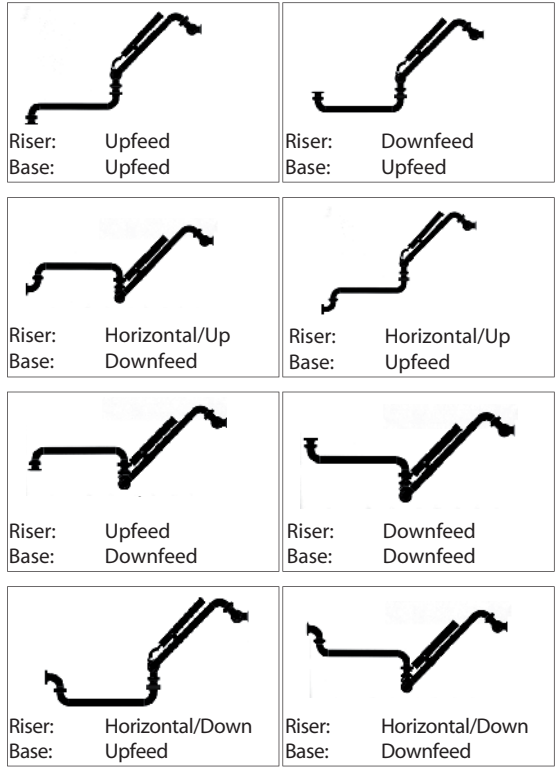

E2033

Dimensions and technical data

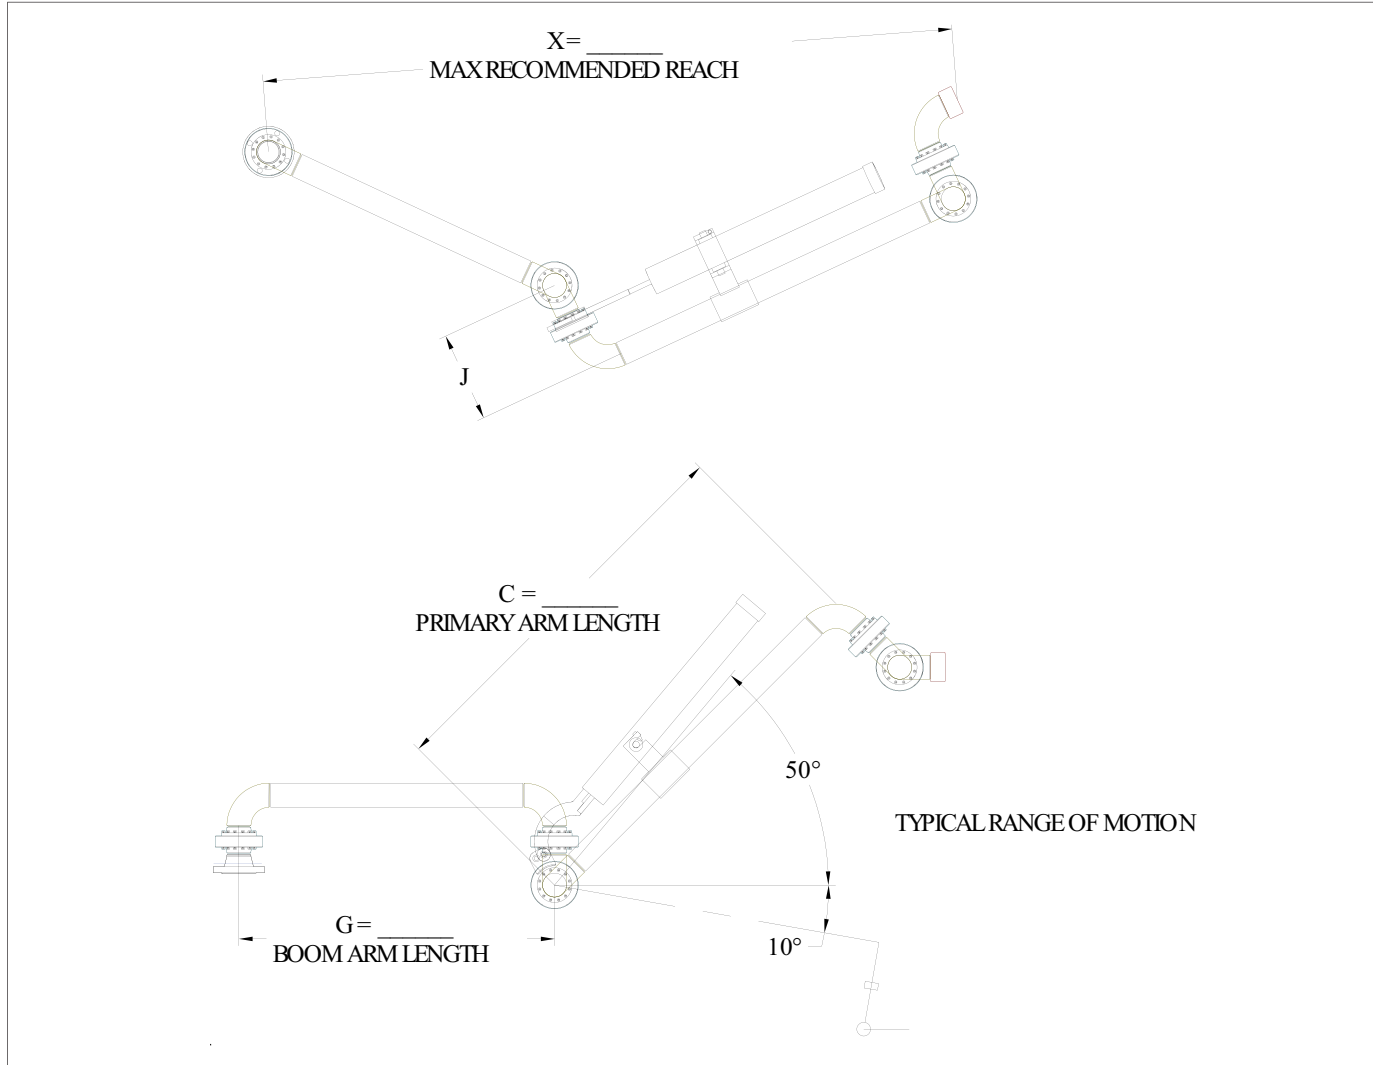

Dimensions

	Approx. weight	Typical		J	Reach X
		C	G		
3"	260 lbs	60"	48"	13.1"	96"
4"	350 lbs	60"	60"	16.1"	108"
6"	410 lbs	60"	60"	24.5"	108"

Swivel joints: All D2000 World Series

Balance mechanism: Spring cylinder

Better by Design

Whilst the content of this leaflet has been edited with the greatest care, we are not liable for any errors and/or omissions. Subject to change without notice.



EMCO WHEATON
A Gardner Denver Product

EMCO WHEATON USA INC
9111 Jackrabbit Road · Houston, Texas 77095 · USA
Phone +1 281 856-1300 · Fax +1 281 856-1325
www.emcowheaton.com · sales-us@emcowheaton.com